





## Key Features

- USB capture video complying with UVC for live streaming
- 4CH HDMI inputs
- 2" TFT display on board to Live preview four inputs
- Auto cut and manual switch (T-Bar)
- 14 transition effects on T-Bar
- Support PIP (Picture-In-Picture)
- Audio offers AFV or Line In mode.
- Support switch between 6-Picture PVW and PGM to HDMI Ou
- Control by PC or mobile phone (via APP)
- Compact design

## Application Diagram

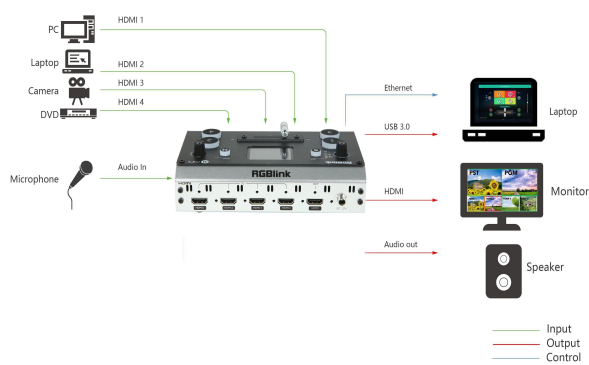

## Dimensions

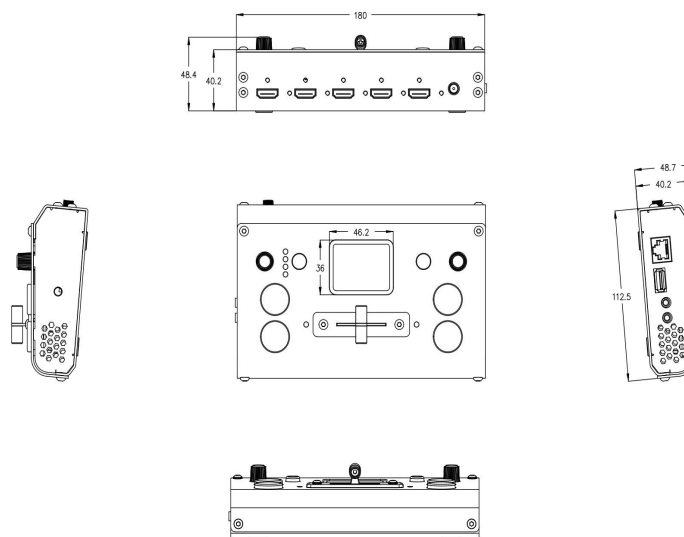

## Order Codes

Product Code	Item
230-0001-01-0	mini
291-0001-03-0	Portable ABS Case

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com  
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.



www.rgblink.com

Specifications are correct at time of printing and subject to change or alteration without noti

## Specification

<b>Connectors</b>	Input	HDMI In	4×HDMI-A	
	Output	HDMI Out	1×HDMI-A	
		USB 3.0	1×USB TypeA	
	Audio	In	1×3.5mm Stereo Jack	
		Out	1×3.5mm Stereo Jack	
	Communication	LAN	1×RJ45	
Power		1×DC Jack		
<b>Performance</b>	Input Resolutions	HDMI SMPTE 720p@50/60   1080i@50   1080p@23/24/30/50/60 VESA 1024×768@60   1280×720@60   1280×768@60   1280×800@60   1280×1024@60   1360×768@60   1366×768@60   1440×900@60   1600×1200@60   1680×1050@60   1920×1080@60   1920×1200@60		
	Output Resolutions	HDMI SMPTE 720p@50/60   1080p@24/25/30/50/60 VESA 1024×768@60   1280×720@50/60   1280×768@60   1280×1024@60   1360×768@60   1920×1080@24/25/30/50/60 USB   H.265 1024×768@60   1280×1024@60   1360×768@60   1920×1080@30   1920×1080@50   1920×1080@60 Note : Refer connected computer for applicable resolution support		
	Supported Standards	HDMI	1.3	
		USB	3.0	
	H.265	ITU-T H.265/ ISO/IEC 23008-2		
<b>Power</b>	Input Voltage	DC 12V/1.5A		
	Constant Power	13.2W		
	Max Power	18W		
<b>Environment</b>	Temperature	-0℃~70℃		
	Humidity	10%~85%		
<b>Physical</b>	Weight	Net	0.5kg	
		Packaged	1pc	1.25kg
			10pcs	13.00kg
			20pcs	24.00kg
	Dimension	Net	180mm×113mm×49mm	
		Packaged	1pc	255mm×145mm×85mm
10pcs			490mm×305mm×345mm	
20pcs			565mm×490mm×345mm	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

**RGBlink**<sup>®</sup>

www.rgblink.com

